




装配例

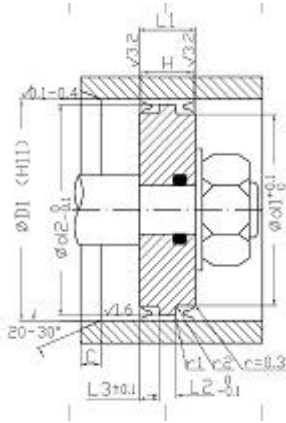

型式例

截面图	材料	温度范围	压力	速度	特点	代号
	NBR	-30至80	≤1.6	≤1	结构尺寸紧凑小, 摩擦力小, 密封性好	QW4

D1	d1	H	d2	L1	L2	L3	D1	d1	H	d2	L1	L2	L3
16	10	10.5	13.5	12	3	4.5	63	56	12	60.2	13	3	5
18	12	10.5	15.5	12	3	4.5	70	62	13	67.5	15	4	5.5
20	14	10.5	17.5	12	3	4.5	76	66	18	73	20	6	7
25	18	12	22.5	13	3	5	80	70	18	77	20	6	7
28	22	10.5	25.5	12	3	4.5	80	72	13	77.4	15	4	5.5
30	23	12	27.5	13	3	5	100	88	21	96.5	23	8	7.8
32	25	12	29.5	13	3	5	100	90	16	97	18	4	7
35	28	12	32.5	13	3	5	125	113	15	122	17	5	6
40	33	12	37.5	13	3	5	125	113	21	121.5	23	8	7.5
45	38	12	42.5	13	3	5	130	120	17	127	19	5	7
50	43	12	47.5	13	3	5	140	128	21	136.5	23	8	7.5
54	46	13	51.5	15	4	5.5	150	140	17	147	19	5	7
63	53	17	60	19	5	7	160	140	26	155.5	23	10	9.5